
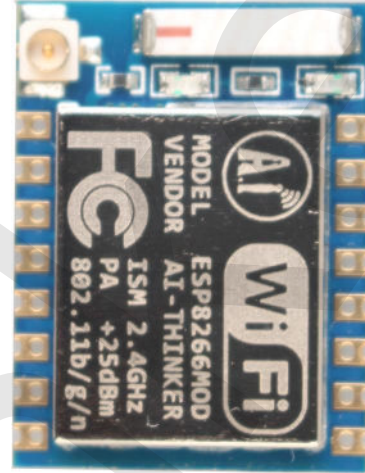


## ESP-07 802.11 b/g/n Wi-Fi Module

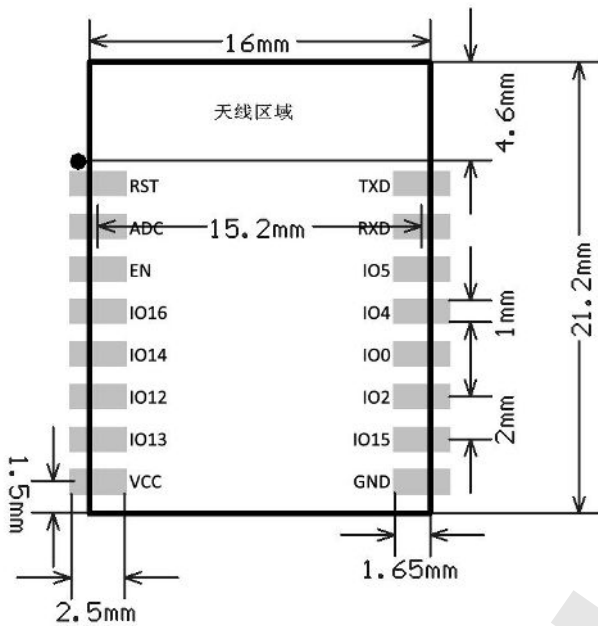

### Features

- The smallest 802.11b/g/n Wi-Fi SOC module
- Low power 32-bit CPU, can also serve as the application processor
- Up to 160MHz clock speed
- Built-in 10 bit high precision ADC
- Supports UART/GPIO/IIC/PWM/ADC
- SMD-16 package for easy welding
- Integrated Wi-Fi MAC/BB/RF/PA/LNA
- Deep sleep current as low as 20uA
- Embedded lwIP protocol stack
- Supports STA/AP/STA + AP operation mode
- Support Smart Config/AirKiss technology
- UART baudrate up to 4Mbps
- General AT commands can be used quickly
- Supports remote firmware upgrade (FOTA)

### Overview

ESP-07 has a highly competitive package size and ultra-low power technology.

ESP-07 can be widely used in a variety of networking, for home automation, industrial wireless control, baby monitors, wearable electronic products, wireless location sensing devices, wireless positioning system signals and other networking applications.

ESP-07 is packaged in SMD, through the standard SMT equipment to achieve rapid production of products, to provide customers with high reliability of the connection, especially for automation, large-scale, low-cost modern production methods, It's suitable for all kinds of Internet of things hardware terminal occasions.

## Product Specifications

Module Model	ESP-07
Package	SMD-16
Size	21.2*16*3 (±0.1) mm
SPI Flash	Default 8Mbit
Interface	UART/GPIO/ADC/PWM
IO Port	9
UART Baudrate	Support 300 ~ 4608000 bps , Default 115200 bps
Frequency Range	2412 ~ 2484MHz
Antenna	Built-in ceramic antenna or IPEX
Secondary Development	Support
Transmit Power	802.11b: 16±2 dBm (@11Mbps) 802.11g: 14±2 dBm (@54Mbps) 802.11n: 13±2 dBm (@HT20, MCS7)
Receiving Sensitivity	CCK, 1 Mbps : -90dBm CCK, 11 Mbps: -85dBm 6 Mbps (1/2 BPSK): -88dBm 54 Mbps (3/4 64-QAM): -70dBm HT20, MCS7 (65 Mbps, 72.2 Mbps): -67dBm
Power (Typical Values)	Continuous Transmission => Average: ~ 71mA, Peak: 300mA Modem Sleep: ~20mA Light Sleep: ~2mA Deep Sleep: ~0.02mA
Security	WEP/WPA-PSK/WPA2-PSK
Power Supply	Voltage 3.0V ~ 3.6V, Current >300mA
Operating Temperature	-20 °C ~ 85 °C
Storage Environment	-40 °C ~ 90 °C , < 90%RH
Weight	0.40g

## Contact US

ShenZhen Ai-Thinker Technology Co., Ltd

Address: 6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Bao'an Road, Baoan District, Shenzhen ,China

 Website: [www.ai-thinker.com](http://www.ai-thinker.com)

Tel: 400-855-5368

 E-mail: [support@aithinker.com](mailto:support@aithinker.com)