


TAKER H60 Mini AM32 60A 4IN1 ESC

Input Voltage: 3-8S Lipo
 Continue Current: 60A
 Burst Current: 65A (5 seconds)
 Galvanometer: Support
 Support Protocol: Dshot 150/300/600
 Size: 36x43mm
 Install hole: 20x20mm
 Target: AM32 GEPRC 4IN1 F421

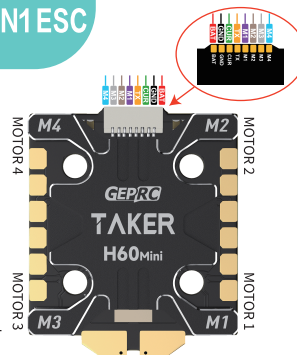

TAKER H60 Mini AM32 60A 4IN1 电调

输入电压: 3-8S Lipo
 持续电流: 60A
 峰值电流: 65A (5 秒)
 电 流 计 : 支持
 支持协议: Dshot 150/300/600
 尺 寸: 36x43mm
 安装孔位: 20x20mm
 固件目标: AM32 GEPRC 4IN1 F421

